

INSTRUCTION SHEET FOR SET#'s 4.3119, 4.3121, 4.3124, 4.3133



1131 VIA CALLEJON, SAN CLEMENTE, CA 92673

It is recommended that if you are unfamiliar with this type of work that you refer to a qualified service center specializing in this type of work. It is also recommended that if you choose to do this work yourself that a factory service manual be obtained for the proper procedures pertaining to removal, replacement and proper torque specifications for your vehicle. This instruction set is intended as a guideline for the safe installation of Energy Suspension's Polyurethane.


© 2003 Energy Suspension. All rights reserved.
May not be reproduced, in any form, or by any means,
without the written consent of Energy Suspension.

Except for set 4.3133, you must reuse your metal shell that is pressed into your I-beam, do not damage this shell.


For set 4.3124, the round thrust washer #3168 will fit around the oval bushing.

Remember to thoroughly coat the polyurethane bushing, the shell I.D., and the sleeve with grease.
(All surfaces that contact with metal)

4.3119

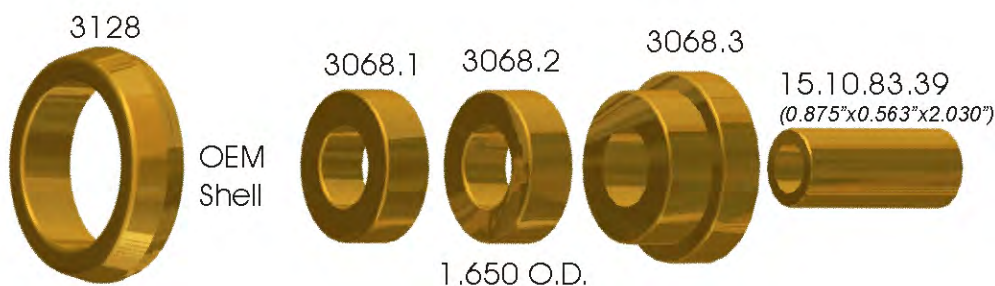

4.3121

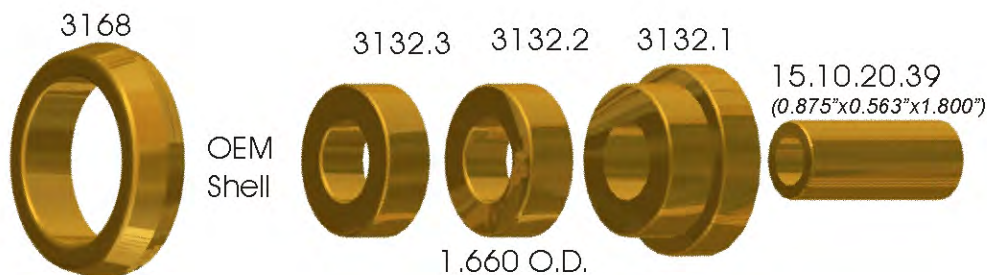

4.3124



4.3133

